




Titan EX™ Series

LED Round High Bay

100w/150w/200w



IP65	IK06	VOLTS 100-277
CRI 80	CCT 6500K	PF >0.90
Lumens 100l/w	2kV Surge Protector	 30,000
 120° Beam Angle	 -20°C~40°C	3 YEAR Warranty


Heavy industry is a broad description of many industries such as paper mills, foundries, casting or welding facilities and many more. One common attribute is that they are difficult environments for light fixtures. The Titan EX™ Series High Bay provides quick and easy installation for retrofitting outdated HID and linear fluorescent high bays.

The Titan EX™ Series High Bay is an economic solution for both low bay and high bay applications. Designed with good optics, the Titan EX™ Series delivers great performance utilizing LED technology.

A unique radial body & fins allows to operate in -20°C to 40°C ambient environments and maintains the LEDs with controlled temperature, resulting in a stunning 30,000 hours of life @ 100 lumens x watt. The patented Linear Power Supply, 100-277V PF>0.90, has a powerful 2KV surge protection, to ensure safe performance.

The Titan EX™ Series High Bay is designed to efficiently light any large interior space such as, warehouses, stores, public spaces, machining, foundries, automotive, packaging among many other applications.

Dimensions (mm)

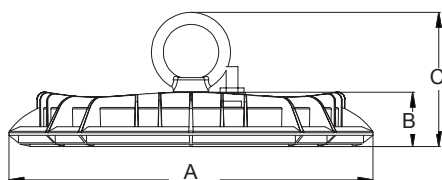

Watt	A	B	C
100w	254	38.3	72.2
150w	300	39.6	72.2
200w	330	41.8	72.2

Ordering information

Item	Watts	Lumens	Options
AL674290	100w	10000	Blank 6500K
AL674291	150w	15000	5 5000K
AL674292	200w	20000	4 4000K

Notes

- Lumen tolerance= ± 7-10%
- Die-casting Aluminum + Tempered glass 4mm
- Die cast zinc hook
- Stainless steel screws
- Power Cable = 30 cms 3 X 1.0mm² rubber wire

Packing information

Model	CBM (Master)	Pieces/master	Box Dimensions (cm)	Gross weight (Kg)
100w	0.0337	10	48 x 26.5 x 26.5	10
150w	0.0470	10	49 x 31 x 31	14.1
200w	0.0624	10	54 x 34 x 34	17.5